



Remington MB4040 Cover Assembly Replacement

Removing the cover portion of the device to get to the internal components.

Written By: Cameron Carnahan



INTRODUCTION

Prerequisite Only



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Remove Blade Assembly



- Press the black button below the blade to remove the blade.

Step 2 — Remove Back Cover Hardware



- Place the device so the back of the product is facing up.
- Remove the two 11.0 mm PH00 screws from the black plastic housing at the bottom of the device.

Step 3 — Remove Front Cover Hardware





- Remove the chrome plated plastic piece by using the plastic opening tool to pry it from the housing assembly.
- Remove the small clear plastic piece that covers the zoom wheel numbers.

Step 4 — Front Cover (cont.)



- Remove the two 16.0 mm PH00 screws from the front cover.
- Use the blue plastic opening tool to pry apart the two halves of the device.

Step 5 — Blade Button Removal

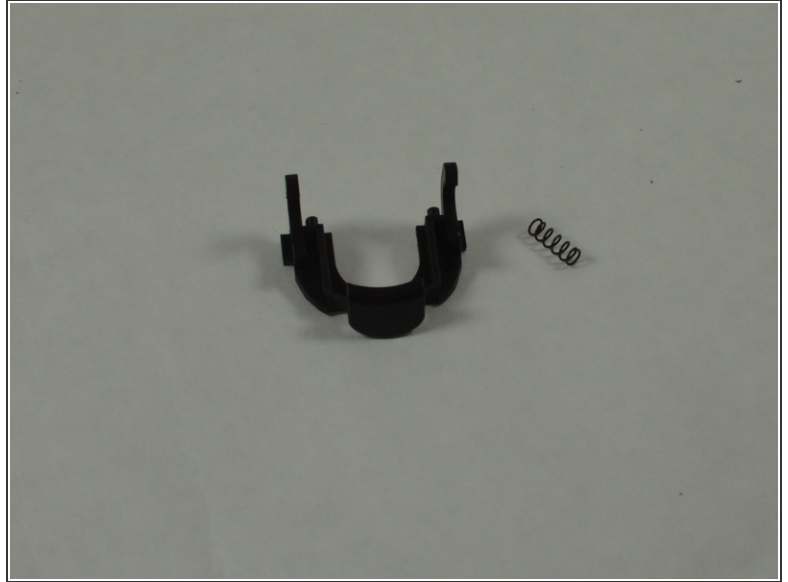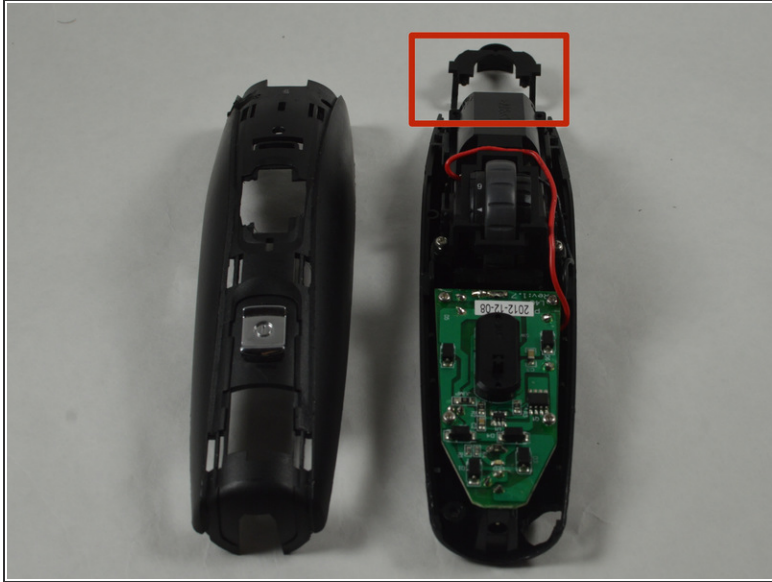

- Remove the black blade button and the two 10.0 mm springs, which are sandwiched between the cover assembly halves.
- ⓘ The blade button is sandwiched between the halves and the two springs may fall out when the halves are separated.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-27 12:20:12 AM.